



NORTHERN FLAME AZAR 14kW DOUBLE SIDED

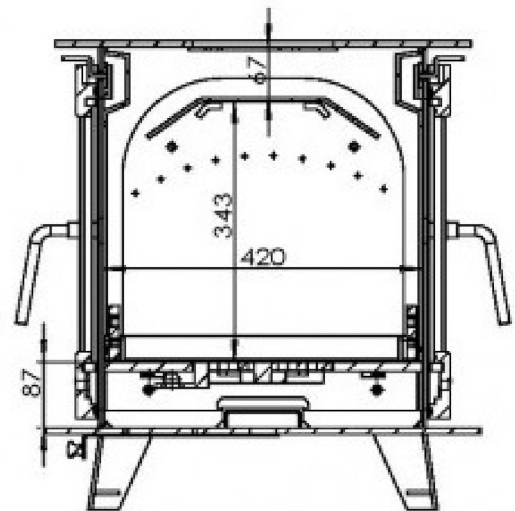

The minimum setting for the secondary air control was set at 30 mm open based on the travel of the slider from the fully closed position

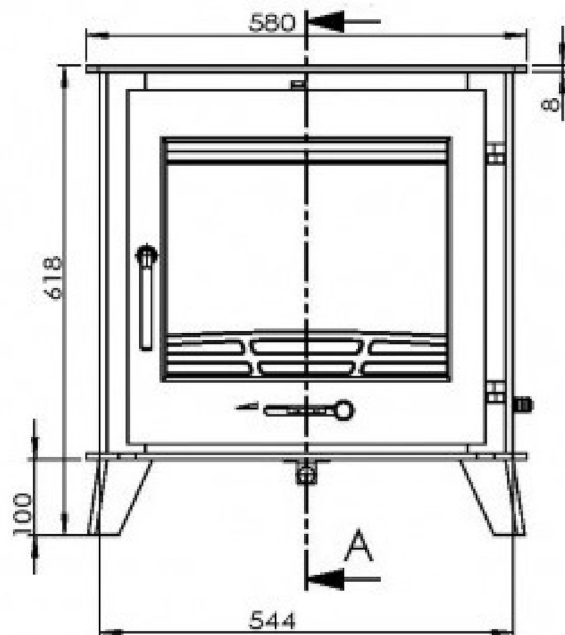